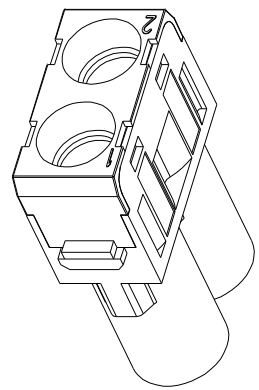





REVISION DATA				
SYM	ECN	DESCRIPTION	DATE	APPROVED





技术参数:
 插芯:
 插针数: 2
 额定电流: 70A
 额定电压: 1000V
 额定耐受脉冲电压: 8KV
 污染等级: 3
 材料: Polycarbonate

Specifications:
 Inserts:
 Number of contacts: 2
 Rated current: 70A
 Rated voltage: 1000V
 Rated impulse voltage: 8KV
 Pollution degree: 3
 Material: Polycarbonate

插针:
 接线方式: 轴向螺栓连接
 材料: 铜合金
 表面处理: 镀银
 接触电阻: $\leq 0.5m\Omega$
 线径范围: 6-16mm²
 内六角扳手: SW2.5

Contacts:
 Terminal: screw terminal
 Material: Copper alloy
 Surfac: hard-silver plated
 Contact resistance: $\leq 0.5m\Omega$
 Crimp terminal
 Wire gauge--mm²: 6~16mm²
 Wire gauge--AWG:
 Hexaonal driver: SW2.5

Tolerance		SIGNATURE	DATE	Units	mm	 宁波欧科瑞连接器有限公司 NINGBO OKERUI CONNECTOR CO.,LTD.	
0~ ≤ 20 ± 0.15	DRAW			Size	A4		
20~ ≤ 50 ± 0.25	DESIGN			Scale		PART NAME: HZW-HMK7-002.1-M	
50~ ≤ 80 ± 0.35	CHECK			Sheet		Drawing NO.	REV
80~ ≤ 120 ± 0.50	APPROVE			Proj.		Material	A